
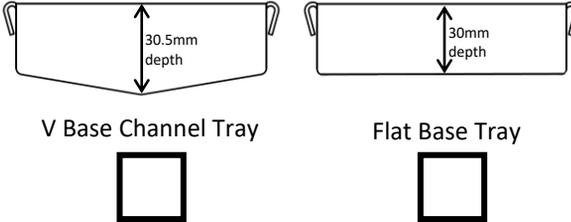







Select Tile Insert or Heelguard Grate	Select Tray Base Design	Depth required if not as standard
 <p>Tile Insert      Heelguard Grate</p>	 <p>V Base Channel Tray      Flat Base Tray</p>	<p>Depth required</p> <p>_____ mm</p>

Select Additional Options if required			
 <p>Standard Channel No additional options</p>	 <p>Crushed Edge</p>	 <p>Edge Floor Trough</p>	 <p>Edge Trough with Wall Flange</p>
<input type="checkbox"/>	OR	<input type="checkbox"/>	<input type="checkbox"/>

Select Channel WIDTH (mm) Overall	Select Channel LENGTH (mm) Overall
 <p>(mm)</p>	 <p>(mm)</p>
<input type="checkbox"/> 85mm <input type="checkbox"/> 110mm <input type="checkbox"/> Other: _____ (mm)	<input type="checkbox"/> 600mm <input type="checkbox"/> 750mm <input type="checkbox"/> 900mm <input type="checkbox"/> 1200mm <input type="checkbox"/> Other _____ mm

Select OUTLET Size (mm)	Select OUTLET Position	Select COLOUR Finish
 <p><input type="checkbox"/> 45mm    <input type="checkbox"/> 90mm    <input type="checkbox"/> Other _____ mm</p>	<p><input type="checkbox"/> Centre Position</p> <p><input type="checkbox"/> _____ mm from Left Edge</p> <p><input type="checkbox"/> _____ mm from Right Edge</p>	<p><input type="checkbox"/> Stainless Steel    <input type="checkbox"/> Matte Black    <input type="checkbox"/> Specify Colour _____</p>

Customer Name : \_\_\_\_\_

Contact Number & Email: \_\_\_\_\_

Site Address: \_\_\_\_\_

Preferred Merchant: \_\_\_\_\_

Fabrication Approval to Proceed:

Name \_\_\_\_\_ Signature: \_\_\_\_\_ Date: \_\_\_\_\_

## References



### V Channel

Smart Wastes Australia's special 'V' profile allows for greater draining volumes while maintaining a slimline stylish design.



### Crushed Edge

Crushed edges allow for an application that may require a slightly shallower floor depth.



### Edge Troughs

The Smart Waste Edge Drain is the only modular off the shelf Stainless Steel channel drainage system that incorporates a horizontal tile floor flange on all four sides. This configuration creates a sump that can be waterproofed over to create a guaranteed seal between the floor and the channel. It is a versatile and easy to install product that eliminates installation delays as it can be modified on-site to suit any changes to the outlet position. It comes complete with an adjustable outlet that can be drilled and positioned anywhere on the base of the channel.



## Terms and Conditions

By agreeing/signing this order form you hereby understand that the items you are ordering are handmade and made-to-order items that are created in our warehouse. By agreeing to this order, the signatory to this agreement consents to SWA to proceed with the specified product.

The customer understands that it is their sole responsibility to check the measurements and design of the product and approve the product for accuracy. Once an order is placed, it is assumed that all submitted measurements have been approved and accepted by the customer and no subsequent cancellation of such order is possible once production is in progress. Any modifications to the design, quantities and/or measurements requested by the customer after SWA's receipt of the signed order, it will be the customer's sole responsibility and a full payment will be required before any modifications and rework proceeds.

The customer acknowledges that there may be certain orders that SWA is unable to accept and must cancel. Where possible, every effort will be made to offer the best possible product to meet the customer's requirements. SWA reserve the right, at their sole discretion, to refuse or cancel any order for any reason.

A 40% deposit will be required to secure all orders. Balance due before delivery.